




TRP-03 & TRP-12 Single Mode

OC-03/STM-1 & OC-12/STM-4 LC Small Form-factor Pluggable (SFP) Single Mode Transceivers

Features

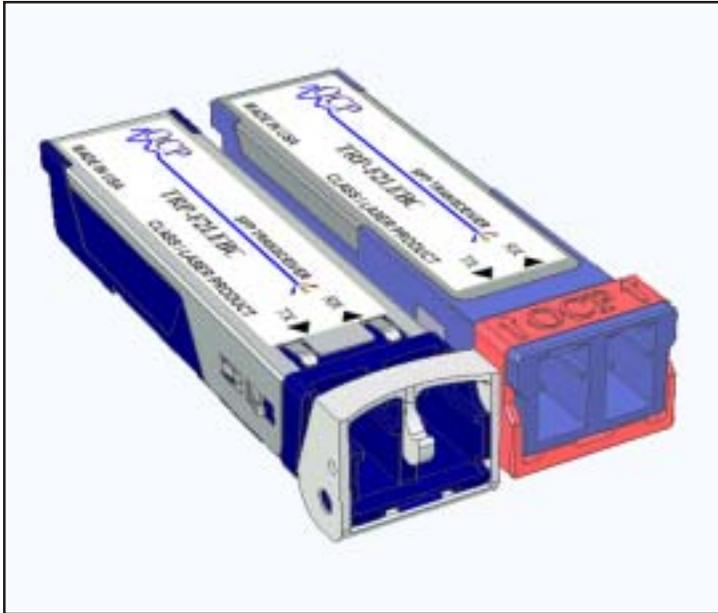

- ☑ Fully Compliant with Small Form-factor Pluggable (SFP) Multi-Source Agreement
- ☑ Fully Compliant with SONET/SDH OC-3 (155Mb/s) & OC-12 (622 Mb/s)
- ☑ Long Reach 1310nm (40Km distance) and 1550nm (80Km) as well as Intermediate Reach (15Km)
- ☑ Hot-pluggable
- ☑ - 40°C to + 85°C operating temperature, ("A" Option)
- ☑ Excellent EMI & ESD protection
- ☑ TX Fault & Loss of Signal outputs
- ☑ TX Disable input
- ☑ Duplex LC Connector interface
- ☑ Single + 3.3 V supply voltage

Description

The TRP-03 & TRP-12 Small Form-factor Pluggable (SFP) fiber optic transceiver offers a simple and convenient way to interface PCBs to single mode fiber optic cables. Many performance versions are available which are fully compliant with SONET/SDH standards for OC-3/STM-1 and OC-12/STM-4. All modules satisfy Class I Laser Safety requirements in accordance with the US FDA/CDRH and international IEC-825 standards.

The TRP-03 & TRP-12 use the SFP 20-pad connector to allow hot plug capability. Thus, the system designer can make configuration changes or maintenance simply by plugging in different type of converters without removing the power supply from the host system.

The transceivers offer two different types of release latches, Wrap Around latch and Cam latch. Both latches are

conformance to Small Form-factor Pluggable (SFP) multisource agreement. Both latches are designed to offer an easy and convenient way to release the module.

The transmitter incorporates a highly reliable 1300 nm or 1550 nm InGaAsP Laser and a driver circuit which converts data to light. The receiver features a transimpedance amplifier IC for high sensitivity and wide dynamic range. The transmitter and receiver DATA interface are AC coupled internally. An LV-TTL Transmitter Disable control input and Loss of Signal output interface are also provided.

The transceiver operates from a single +3.3V power supply over an operating temperature range of -5°C to +70°C (option "B"), and -40°C to +85°C (option "A"). The package is made of plastic and metal for EMI enhancement.

Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Units
Storage Temperature	T_{st}	- 40	+ 85	°C
Operating Ambient Temperature ¹	"A" option	- 40	+ 85	°C
	"B" option	- 5	+ 70	
Supply Voltage	V_{CC}	0	+ 5.0	V
Input Voltage	V_{in}	0	V_{CC}	V

¹ With a minimum of 100 linear foot per minute (LFM) of airflow on the cage.

TRP-03 Single Mode

Transmitter Performance Characteristics (over Operating Temperature Range)

Parameter		Symbol	Minimum	Typical	Maximum	Units
Data Rate		B	50	156	300	Mb/s
Average Optical Output Power (coupled into single mode fiber), 50% duty cycle ¹	L0	P_o	- 5.0	- 3.0	0	dBm
	L3		- 15.0	- 11.0	- 8.0	
Extinction Ratio		P_{hi}/P_{lo}	10	-	-	dB
Center Wavelength	IR (Intermediate Reach)	λ_c	1261	1310	1360	nm
	LR1 (Long Reach 1310 nm)		1270	1310	1360	
	LR2 (Long Reach 1550 nm)		1480	1550	1580	
Spectral Width (RMS)	IR & LR1	$\Delta\lambda_{RMS}$	-	-	3	nm
Spectral Width (-20 dB)	LR2	$\Delta\lambda_{20}$	-	-	1	
Side Mode Suppression Ratio	LR2	$SMSR$	30	-	-	dB
Optical Output Eye	compliant with Telcordia GR-253-CORE and ITU-T Recommendation G.957					

¹ Other optical output power versions are also available, consult factory.

Receiver Performance Characteristics (over Operating Temperature Range)

Parameter		Symbol	Minimum	Typical	Maximum	Units
Data Rate		B	50	156	266	Mb/s
Receiver Sensitivity (10^{-10} BER) ¹		P_{min}	- 34.0	- 36.0	-	dBm
Maximum Input Optical Power (10^{-10} BER) ¹		P_{max}	- 7.0	0	-	dBm
Signal Detect Thresholds	Increasing Light Input	P_{sd+}	-	-	- 34.0	dBm
	Decreasing Light Input	P_{sd-}	- 45.0	-	-	
Signal Detect Hysteresis		-	0.5	1.5	-	dB
Wavelength of Operation		λ	1100	-	1600	nm

¹ Specified in Average Optical Input Power and measured at 156Mb/s and 1300 nm (1550 nm for LR2) wavelength with 2^{23} -1 PRBS.

Ordering Information (Wrap Around Latch)

Model Name		SONET /SDH Standad	Distance ¹
-5°C to 70°C Operating	- 40°C to +85°C Operating ²		
TRP-03L3I1B	TRP-03L3I1A	IR-1 / S-1.1	21 / 15 km
TRP-03L0L1B	TRP-03L0L1A	LR-1 / L-1.1	50 / 40 km
TRP-03L0L2B	TRP-03L0L2A	LR-2 / L-1.2	100 / 80 km

¹These are target distances to be used for classification and not for specification, per Telcordia GR-253-CORE / ITU-T Recommendation G.957.
²For LR2 modules, the temperature range is -25°C to 75°C.

Ordering Information (Cam Latch)

Model Name		SONET /SDH Standad	Distance ¹
-5°C to 70°C Operating	- 40°C to +85°C Operating ²		
TRP-03L3I1BC	TRP-03L3I1AC	IR-1 / S-1.1	21 / 15 km
TRP-03L0L1BC	TRP-03L0L1AC	LR-1 / L-1.1	50 / 40 km
TRP-03L0L2BC	TRP-03L0L2AC	LR-2 / L-1.2	100 / 80 km

¹These are target distances to be used for classification and not for specification, per Telcordia GR-253-CORE / ITU-T Recommendation G.957.
²For LR2 modules, the temperature range is -25°C to 75°C.

TRP-12 Single Mode

Transmitter Performance Characteristics (over Operating Temperature Range)

Parameter		Symbol	Minimum	Typical	Maximum	Units
Data Rate		B	50	622	700	Mb/s
Average Optical Output Power (coupled into single mode fiber), 50% duty cycle ¹	HP	P_o	- 3.0	- 1.0	+2.0	dBm
	L3		- 15.0	- 11.0	- 8.0	
Extinction Ratio	SR & IR	P_{hi}/P_{lo}	8.2	-	-	dB
	LR1 & LR2		10	-	-	
Center Wavelength ²	SR (Short Reach)	λ_c	1261	1310	1360	nm
	IR (Intermediate Reach)		1274	1310	1356	
			1293	1310	1334	
	LR1 (Long Reach 1310 nm)		1280	1310	1335	
LR2 (Long Reach 1550 nm)	1480	1550	1580			
Spectral Width (RMS) ²	SR (Short Reach)	$\Delta\lambda_{RMS}$	-	-	4.0	nm
	IR (Intermediate Reach)		-	-	2.5 or 4.0	
Spectral Width (-20 dB)	LR1 & LR2	$\Delta\lambda_{-20}$	-	-	1.0	
Side Mode Suppression Ratio	LR1 & LR2	$SMSR$	30	-	-	dB
Optical Output Eye	compliant with Telcordia GR-253-CORE and ITU-T Recommendation G.957					
¹ Other optical output power versions are also available, consult factory. ² For Intermediate Reach version, the Center Wavelength is either $1274 \text{ nm} \leq \lambda_c \leq 1356 \text{ nm}$ for $\Delta\lambda_{RMS} \leq 2.5 \text{ nm}$ or $1293 \text{ nm} \leq \lambda_c \leq 1334 \text{ nm}$ for $\Delta\lambda_{RMS} \leq 4.0 \text{ nm}$.						

Receiver Performance Characteristics (over Operating Temperature Range)

Parameter		Symbol	Minimum	Typical	Maximum	Units
Data Rate		B	50	622	700	Mb/s
Receiver Sensitivity (10^{-10} BER) ¹		P_{min}	- 28.0	- 31.0	-	dBm
Maximum Input Optical Power (10^{-10} BER) ¹		P_{max}	- 7.0	- 3.0	-	dBm
Signal Detect Thresholds	Increasing Light Input	P_{sd+}	-	-	- 28.0	dBm
	Decreasing Light Input	P_{sd-}	- 45.0	-	-	
Signal Detect Hysteresis		-	0.5	1.5	-	dB
Wavelength of Operation		λ	1100	-	1600	nm
¹ Specified in Average Optical Input Power and measured at 622 Mb/s and 1300 nm (1550 nm for LR2) wavelength with $2^{23}-1$ PRBS.						

Ordering Information (Wrap Around Latch)

Model Name		SONET /SDH Standad	Distance ¹
0°C to 70°C Operating	- 40°C to +85°C Operating ²		
TRP-12L3SRB	TRP-12L3SRA	SR-1 / I-4	12 / 2 km
TRP-12L3I1B	TRP-12L3I1A	IR-1 / S-4.1	21 / 15 km
TRP-12HPL1B	TRP-12HPL1A	LR-1 / L-4.1	42 / 40 km
TRP-12HPL2B	TRP-12HPL2A	LR-2 / L-4.2	85 / 80 km
¹ These are target distances to be used for classification and not for specification, per Telcordia GR-253-CORE / ITU-T Recommendation G.957. ² For LR2 modules, the temperature range is -25°C to 75°C.			

Ordering Information (Cam Latch)

Model Name		SONET /SDH Standad	Distance ¹
0°C to 70°C Operating	- 40°C to +85°C Operating ²		
TRP-12L3SRBC	TRP-12L3SRAC	SR-1 / I-4	12 / 2 km
TRP-12L3I1BC	TRP-12L3I1AC	IR-1 / S-4.1	21 / 15 km
TRP-12HPL1BC	TRP-12HPL1AC	LR-1 / L-4.1	42 / 40 km
TRP-12HPL2BC	TRP-12HPL2AC	LR-2 / L-4.2	85 / 80 km
¹ These are target distances to be used for classification and not for specification, per Telcordia GR-253-CORE / ITU-T Recommendation G.957. ² For LR2 modules, the temperature range is -25°C to 75°C.			

TRP-03 & TRP-12 Single Mode

Transmitter Electrical Interface (over Operating Temperature Range)

Parameter	Symbol	Minimum	Typical	Maximum	Units
Input Voltage Swing (TD+ & TD -) ¹	V_{PP-DIF}	0.50	-	2.4	V
Input HIGH Voltage (TX DISABLE) ²	V_{IH}	2.0	-	V_{cc}	V
Input LOW Voltage (TX DISABLE) ²	V_{IL}	0	-	0.8	V
Output HIGH Voltage (TX FAULT) ³	V_{OH}	2.0	-	$V_{cc} + 0.3$	V
Output LOW Voltage (TX FAULT) ³	V_{OL}	0	-	0.8	V

¹ Differential peak-to-peak voltage.

² There is an internal 4.7K to 10Kohm pullup resistor to VccT.

³ Open collector compatible, 4.7K to 10K ohm pullup to Vcc (Host Supply Voltage).

Receiver Electrical Interface (over Operating Temperature Range)

Parameter	Symbol	Minimum	Typical	Maximum	Units
Output Voltage Swing (RD+ & RD-) ¹	V_{PP-DIF}	0.6	-	2.0	Vp-p
Output HIGH Voltage (LOS) ²	V_{OH}	2.0	-	$V_{cc} + 0.3$	V
Output LOW Voltage (LOS) ²	V_{OL}	0	-	0.5	V

¹ Differential peak-to-peak voltage across external 100 ohm load.

² Open Collector compatible, 4.7 K to 10 Kohm pullup to Vcc (Host Supply Voltage).

Electrical Power Supply Characteristics (over Operating Temperature Range)

Parameter	Symbol	Minimum	Typical	Maximum	Units
Supply Voltage	V_{cc}	3.13	3.3	3.47	V
Supply Current	I_{cc}	-	175	245	mA

Module Definition

Module Definition	MOD-DEF0 pin 6	MOD-DEF1 pin 5	MOD-DEF2 pin 4	Interpretation by Host
4	TTL LOW	SCL	SDA	Serial module definition protocol

Application Notes

Electrical interface: All the signal interfaces are compliant with MultiSource Agreement specification. The high speed DATA interface is differential AC-coupled internally with 0.022 μ F. It can be connected to 3.3 V SERDES IC directly. All the low speed control and sense output signals are open collector TTL compatible. Therefore, proper pull-up resistor (4.7 K to 10 K Ω) is required.

Loss of Signal (LOS): The Loss of Signal circuit monitors the level of the incoming optical signal and generates a logic HIGH when insufficient photocurrent is produced.

TX FAULT: The output indicates LOW when the transmitter is operating normally. When HIGH, output indicates a laser fault of some kind. TX FAULT also indicates end of life when 1300 nm lasers are used. TX Fault is an open collector/drain output, which should be pulled up with a 4.7K to 10K Ω resistor on the host board.

TX DISABLE: When the TX DISABLE pin is at logic HIGH, the transmitter optical output is disabled (less than -35 dBm).


Serial Identification: The module definition of SFP is indicated

by the 3 module definition pins MOD-DEF0, MOD-DEF1 and MOD-DEF2. Module Definition 4 specifies a serial definition protocol. For this definition, upon power up, MOD-DEF1:2 appear as NC (no connect) and MOD-DEF0 is TTL LOW. When the host system detects this condition, it activates the serial protocol. The protocol uses the 2-wire serial CMOS E²PROM protocol of the ATMEL AT24C01A/02/04 family of components. When the serial protocol is activated, the serial clock signal (SCL) is generated by the host. The negative edge clocks data from the SFP. The serial data signal (SDA) is for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation.


The data transfer protocol and the details of the mandatory and vendor specific data structures are defined in Small Form-Factor Pluggable (SFP) Transceiver MultiSource Agreement.

Power supply and grounding: The power supply line should be well-filtered. All 0.1 μ F power supply bypass capacitors should be as close to the transceiver module as possible.

TRP-03 & TRP-12 Single Mode

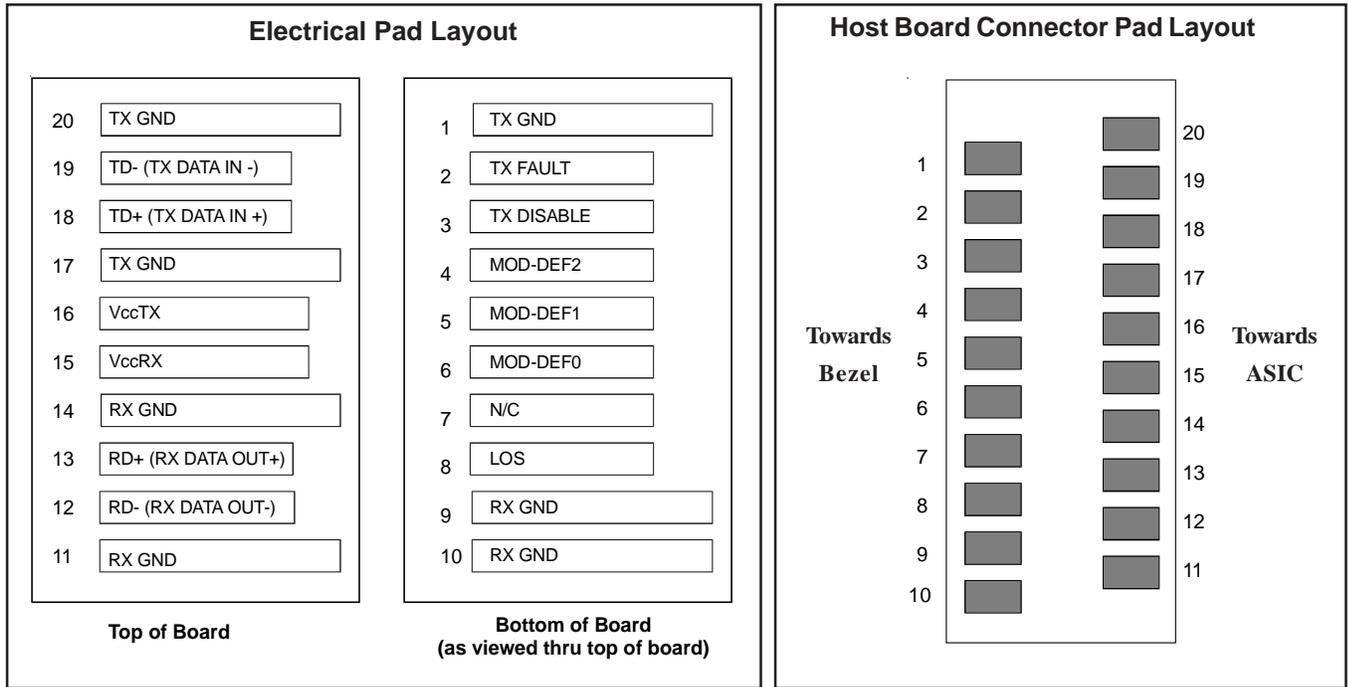

Example of SFP host board schematic.

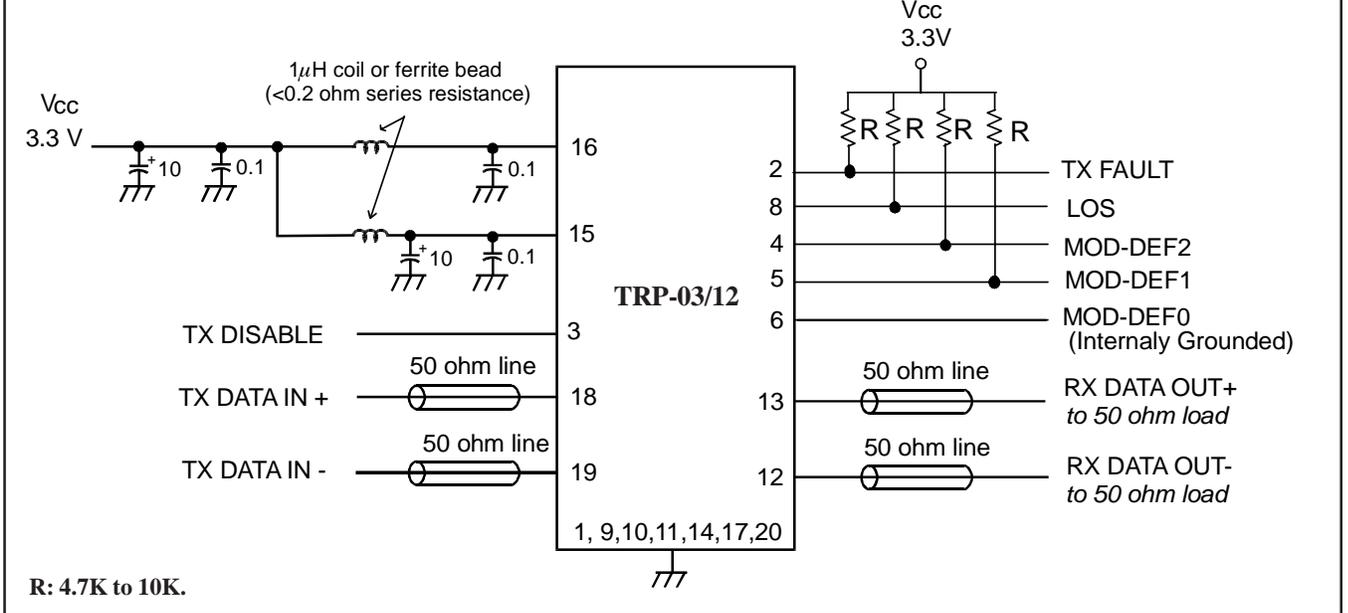

Laser Safety: All transmitters are Class I Laser products per FDA/CDRH and IEC-825 standards. They must be operated under specified operating conditions.


Optical Communication Products, Inc.
DATE OF MANUFACTURE:

MANUFACTURED IN THE USA
This product complies with
21 CFR 1040.10 and 1040.11

Meets Class I Laser Safety Requirements


TRP-03 & TRP-12 Single Mode

Package Outline (Wrap Around latch)

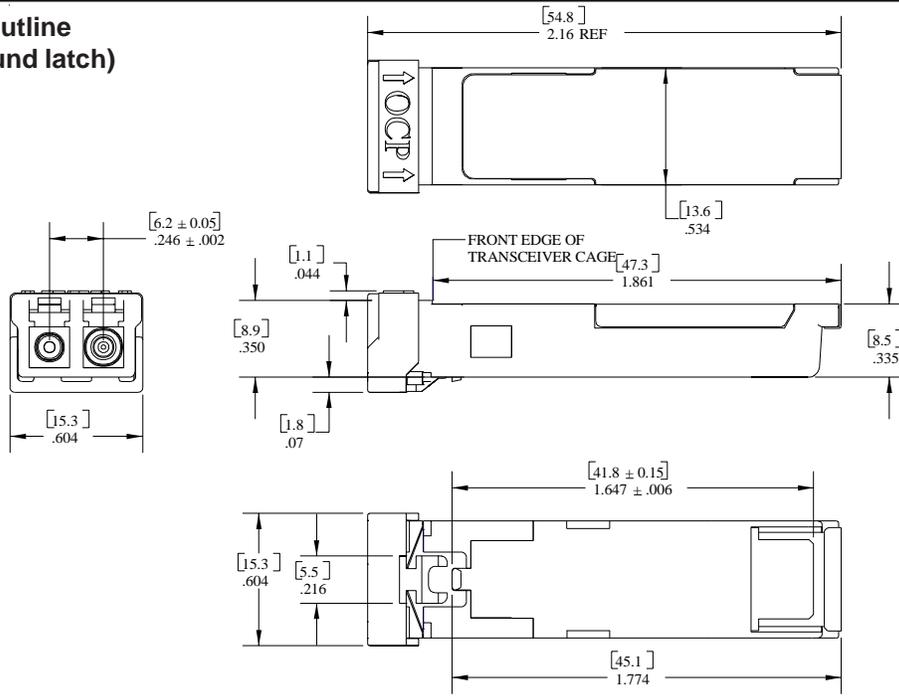

Dimension in inches
[mm]
Default tolerances for all
dimensions given in inches
(Unless otherwise noted)
.xxx = ± 0.005
.xx = ± 0.01

Package Outline (Cam latch)

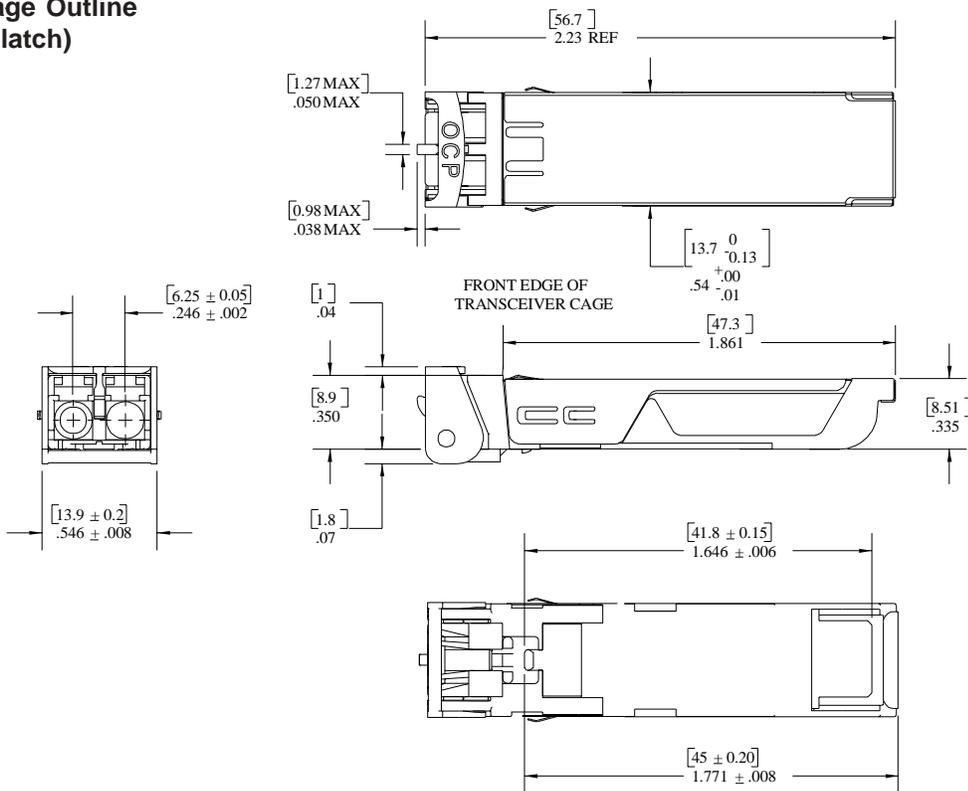

Dimension in inches
[mm]
Default tolerances for all
dimensions given in inches
(Unless otherwise noted)
.xxx = ± 0.005
.xx = ± 0.01

Note: Latch is made of zinc die cast in production modules.

For further information, please refer to applications notes for SFP transceivers.

Optical Communication Products, Inc.

20961 Knapp Street, Chatsworth, CA 91311, Tel.: 818-701-0164, FAX: 818-701-1468, <http://www.ocp-inc.com>

Optical Communication Products, Inc. reserves the right to make changes in equipment design or specifications without notice. Information supplied by Optical Communication Products, Inc. is believed to be accurate and reliable. However, no responsibility is assumed by Optical Communication Products, Inc. for its use nor for any infringements of third parties which may result from its use. No license is granted by implication or otherwise under any patent right of Optical Communication Products, Inc.